



璨华照明保留对产品外观、尺寸和技术参数修改的权利，并不对内容的精确性承担责任。璨华照明保证本目录的内容已被努力检查过，因此不承担此带来的任何形式损失的责任。

Canhua lighting reserves the right to make dimensional, design and technical alterations, No liability can be assumed for the accuracy of content. All statements are non-binding. Canhua lighting made every effort to ensure that the programs and data on this catalogue are tested and checked, Canhua lighting accepts no liability for consequential loss for any kind

特别申明:本画册版权归广东璨华照明科技有限公司所有，未经授权，任何人不能以任何形式转载使用。

画册内容最终解释权归广东璨华照明科技有限公司所有。



2023

户外照明专刊

outdoor lighting catalog

广东璨华照明科技有限公司

GUANGDONG CANHUA LIGHTING TECHNOLOGY CO.,LTD
SUN-KING (HK) LIGHTING CO.,LTD

地址：广东省江门市江海区云沁路源科电子工业园4栋8楼
ADD: Building No.4, Keyuan Industrial Park, Yunqin Road,
Jianghai District, Jiangmen city, Guangdong, China
Tel: +86-750-3760605
E-mail: info@sunkingled.com
Website: www.canhualed.com

全球LED灯光工程照明产品供应商
THE GLOBAL LED LIGHTING ENGINEERING LIGHTING PRODUCTS SUPPLIER


LED FLOODLIGHT

LED投光灯(结构防水)


► SK-TGD23-01A




配光曲线
Distribution Curve

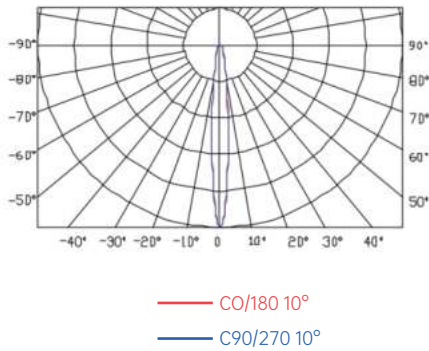

光束角选择
Beam Angle

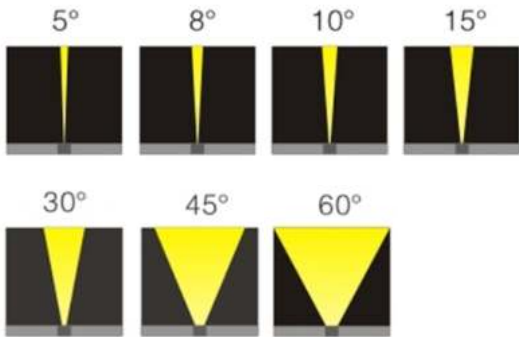

物理尺寸
Dimension

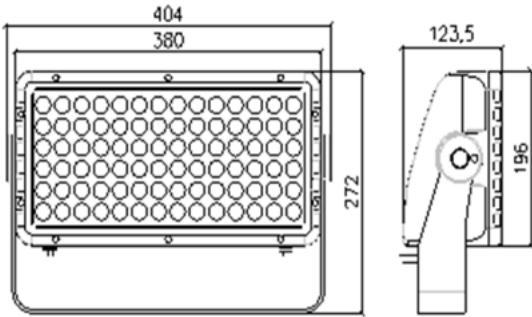

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra 85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L404*196*H272mm 重量Weight: 9kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 96W~150W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-01A	AC85V-265V/DC24V	120W	单色 single color	60pcs	Osram/Cree	8°~60°	ON-OFF
SK-TGD23-01A	AC85V-265V/DC24V	120W	RGB	60pcs	3 in one	8°~60°	DMX512
SK-TGD23-01A	AC85V-265V/DC24V	150W	RGBW	60pcs	4 in one	8°~60°	DMX512

产品特征
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01B



物理尺寸
Dimension

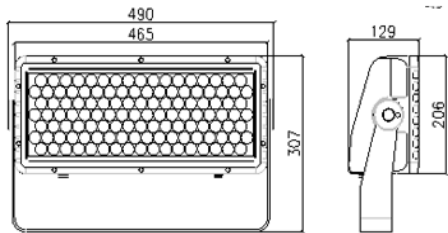

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L490*206*H307mm
重量Weight: 12kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 120W~240W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-01B	AC85V-265V/DC24V	150W	单色 single color	72pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01B	AC85V-265V/DC24V	200W	RGB	72pcs	3 in one	8°~60°	DMX512
SK-TGD23-01B	AC85V-265V/DC24V	240W	RGBW	72pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01C



物理尺寸
Dimension

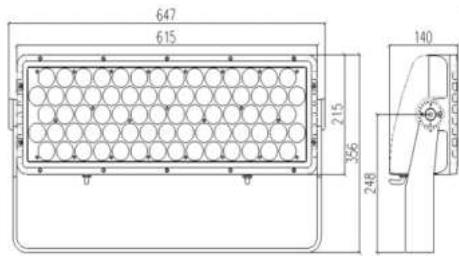

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L647*215*H356mm
重量Weight: 17.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 200W~300W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-01C	AC85V-265V/DC24V	240W	单色 single color	96pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01C	AC85V-265V/DC24V	250W	RGB	96pcs	3 in one	8°~60°	DMX512
SK-TGD23-01C	AC85V-265V/DC24V	300W	RGBW	96pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01D



物理尺寸
Dimension

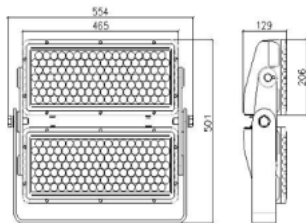

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L540*206*H501mm
重量Weight: 26kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 300W~400W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-01D	AC85V-265V/DC24V	288W	单色 single color	144pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01D	AC85V-265V/DC24V	288W	RGB	144pcs	3 in one	8°~60°	DMX512
SK-TGD23-01D	AC85V-265V/DC24V	300W	RGBW	144pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01E



物理尺寸
Dimension

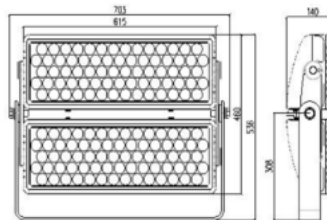

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L647*215*H356mm
重量Weight: 32kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 360W~600W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-01E	AC85V-265V/DC24V	480W	单色 single color	192pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01E	AC85V-265V/DC24V	576W	RGB	192pcs	3 in one	8°~60°	DMX512
SK-TGD23-01E	AC85V-265V/DC24V	600W	RGBW	192pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01XA




产品特点 Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
- 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
- 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.


应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


配光曲线 Distribution Curve

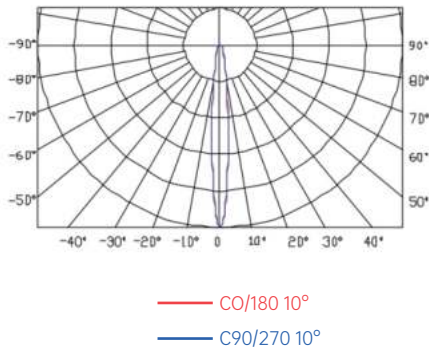

光束角选择 Beam Angle

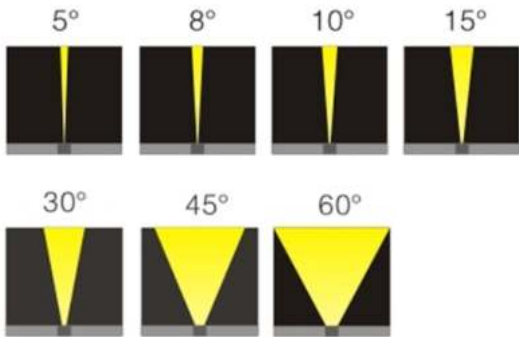

物理尺寸 Dimension

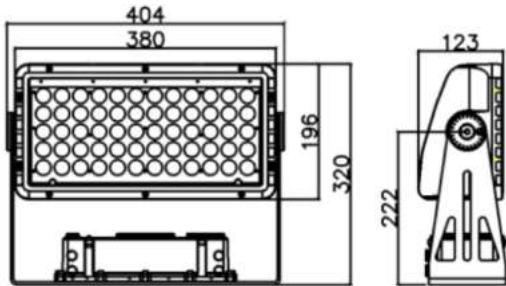

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L404*496*H418mm
重量Weight: 18.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 96W~200W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-01XA	AC85V-265V/DC24V	120W	单色 single color	60pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01XA	AC85V-265V/DC24V	120W	RGB	60pcs	3 in one	8°~60°	DMX512
SK-TGD23-01XA	AC85V-265V/DC24V	120W/150W	RGBW	60pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01XB



物理尺寸
Dimension

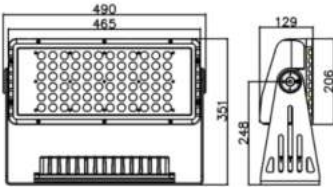

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L490*206*H351mm
重量Weight: 19.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 120W~240W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-01XB	AC85V-265V/DC24V	150W	单色 single color	72pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01XB	AC85V-265V/DC24V	200W	RGB	72pcs	3 in one	8°~60°	DMX512
SK-TGD23-01XB	AC85V-265V/DC24V	240W	RGBW	72pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01XC



物理尺寸
Dimension

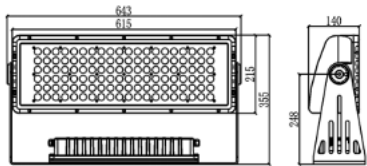

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L643*215*H355mm
重量Weight: 21.2kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 240W~360W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-01XC	AC85V-265V/DC24V	240W	单色 single color	96pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01XC	AC85V-265V/DC24V	300W	RGB	96pcs	3 in one	8°~60°	DMX512
SK-TGD23-01XC	AC85V-265V/DC24V	360W	RGBW	96pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01XD



物理尺寸
Dimension

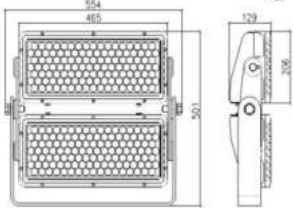

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L554*206*H501mm
重量Weight: 34kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 400W~480W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-01XD	AC85V-265V/DC24V	400W	单色 single color	192pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01XD	AC85V-265V/DC24V	600W	RGB	192pcs	3 in one	8°~60°	DMX512
SK-TGD23-01XD	AC85V-265V/DC24V	480W	RGBW	192pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯(结构防水)

► SK-TGD23-01XE



物理尺寸
Dimension

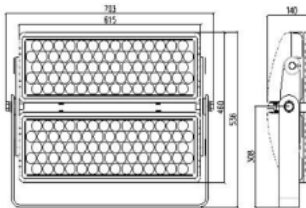

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L703*215*H536mm
重量Weight: 38kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 600W~720W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-01XE	AC85V-265V/DC24V	600W	单色 single color	224pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-01XE	AC85V-265V/DC24V	672W	RGB	224PCS	3 in one	8°~60°	DMX512
SK-TGD23-01XE	AC85V-265V/DC24V	720W	RGBW	224PCS	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯


► SK-TGD23-02A/SK-TGD23-02XA




配光曲线
Distribution Curve

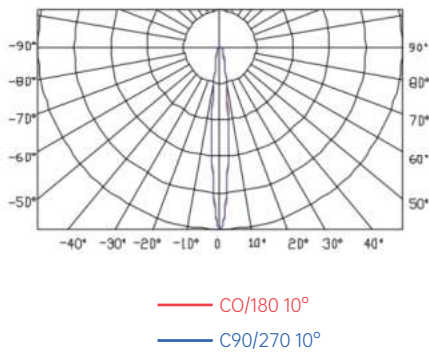

光束角选择
Beam Angle

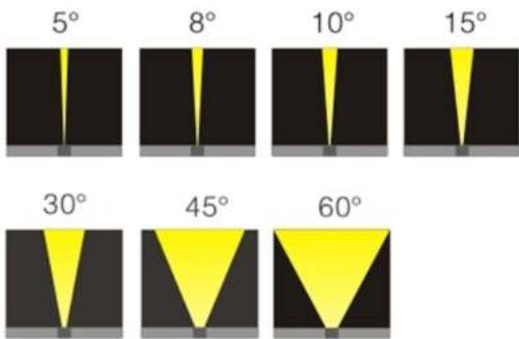

物理尺寸
Dimension

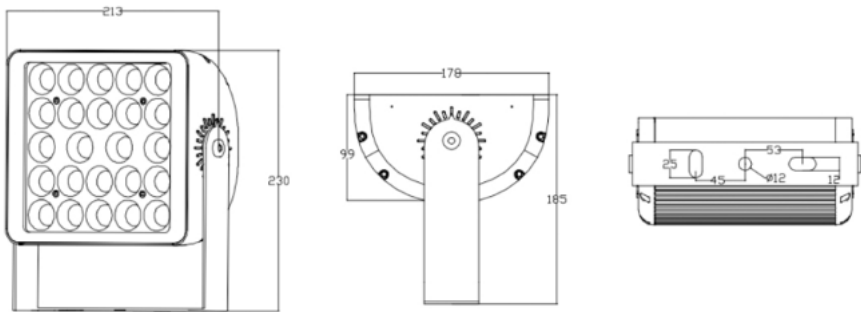

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L213*178*H230mm
重量Weight: 2.2kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-02A	AC85V-265V/DC24V	36W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-02A	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-02A	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512

产品特点
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD23-02B/SK-TGD23-02XB



物理尺寸
Dimension

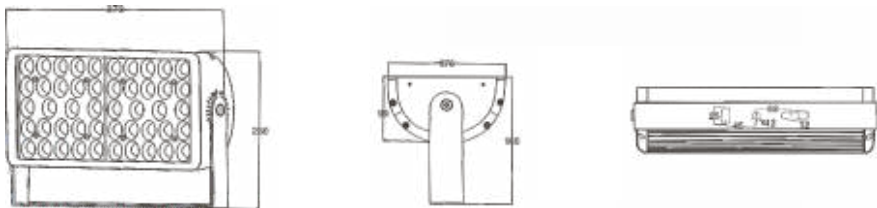

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L373*178*H230mm
重量Weight: 3.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 72W~120W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-02B	AC85V-265V/DC24V	72W	单色 single color	72pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-02B	AC85V-265V/DC24V	108W	RGB	72PCS	3 in one	8°~60°	DMX512
SK-TGD23-02B	AC85V-265V/DC24V	120W	RGBW	72PCS	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-02C/SK-TGD23-02XC



物理尺寸
Dimension

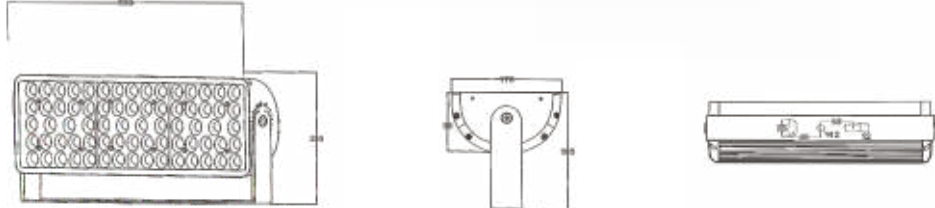

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L533*178*H230mm
重量Weight: 5.2kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 80W~150W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-02C	AC85V-265V/DC24V	96W	单色 single color	96pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-02C	AC85V-265V/DC24V	144W	RGB	96pcs	3 in one	8°~60°	DMX512
SK-TGD23-02C	AC85V-265V/DC24V	150W	RGBW	60pcs/96pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-02D/SK-TGD23-02XD



物理尺寸
Dimension

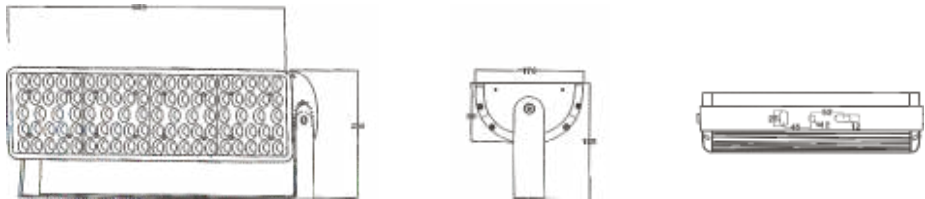

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L693*178*H230mm
重量Weight: 6.3kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 120W~200W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-02D	AC85V-265V/DC24V	120W	单色 single color	120pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-02D	AC85V-265V/DC24V	180W	RGB	120PCS	3 in one	8°~60°	DMX512
SK-TGD23-02D	AC85V-265V/DC24V	200W	RGBW	120PCS	4 in one	8°~60°	DMX512




LED FLOODLIGHT

LED投光灯


► SK-TGD23-03A




配光曲线
Distribution Curve

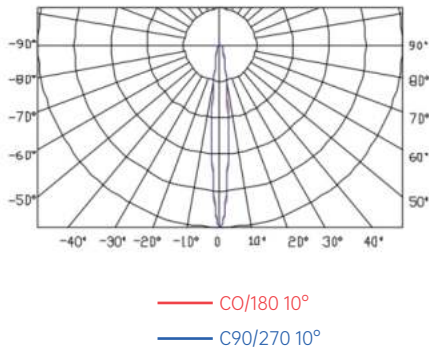

光束角选择
Beam Angle

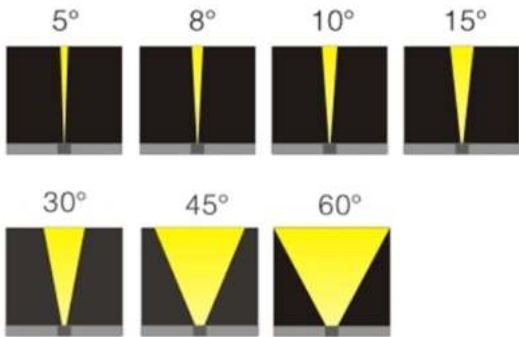

物理尺寸
Dimension

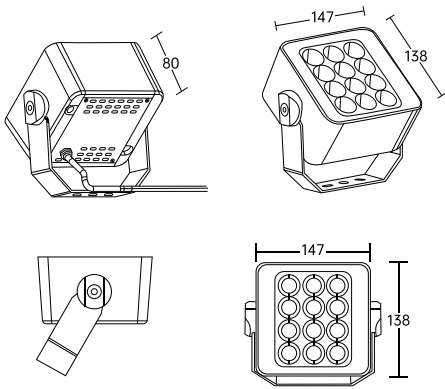

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L147*138*H148mm
重量Weight: 1.9kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 12W~24W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I 类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-03A	AC85V-265V/DC24V	12W/24W	单色 single color	12pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-03A	AC85V-265V/DC24V	12W/24W	RGB	12pcs	3 in one	8°~60°	DMX512
SK-TGD23-03A	AC85V-265V/DC24V	12W/24W	RGBW	12pcs	4 in one	8°~60°	DMX512

产品特点
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD23-03B



物理尺寸
Dimension

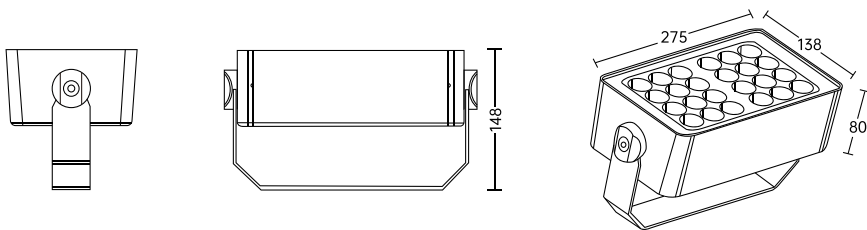

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L275*138*H148mm
重量Weight: 3.3kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 24W~48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-03B	AC85V-265V/DC24V	20W	单色 single color	24pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-03B	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD23-03B	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-03C



物理尺寸
Dimension

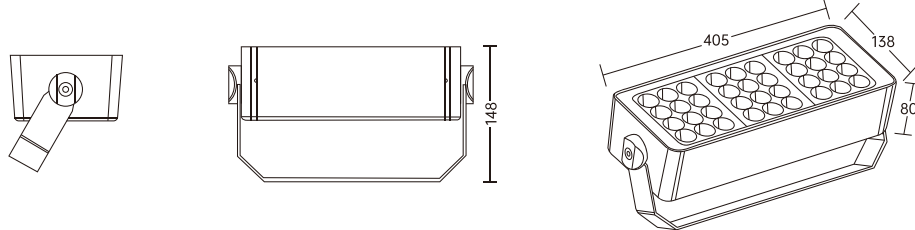

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L405*138*H140mm
重量Weight: 4.3kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-03C	AC85V-265V/DC24V	36W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-03C	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-03C	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯


► SK-TGD23-04A




配光曲线 Distribution Curve

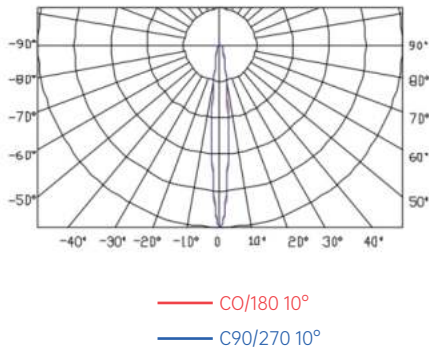

光束角选择 Beam Angle

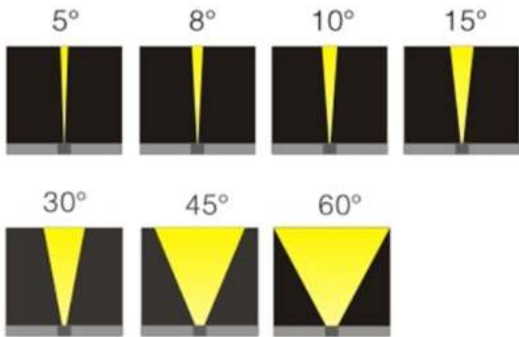

物理尺寸 Dimension

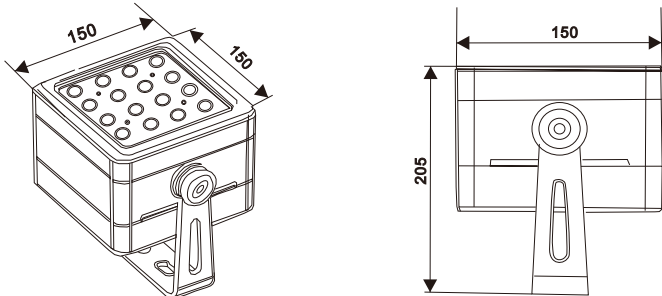

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: 85Ra 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L150*150*H205mm
重量Weight: 4.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 12W/24W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-04A	AC85V-265V/DC24V	16W	单色 single color	16pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-04A	AC85V-265V/DC24V	32W	RGB	16pcs	3 in one	8°~60°	DMX512
SK-TGD23-04A	AC85V-265V/DC24V	32W	RGBW	16pcs	4 in one	8°~60°	DMX512

产品特点 Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD23-04B



物理尺寸
Dimension

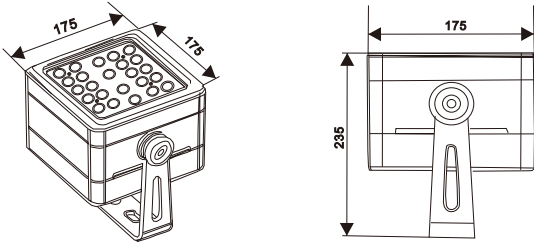

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: 85Ra 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L175*175*H235mm
重量Weight: 6.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 24W/48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-04B	AC85V-265V/DC24V	24W	单色 single color	24pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-04B	AC85V-265V/DC24V	48W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD23-04B	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-04C



物理尺寸
Dimension

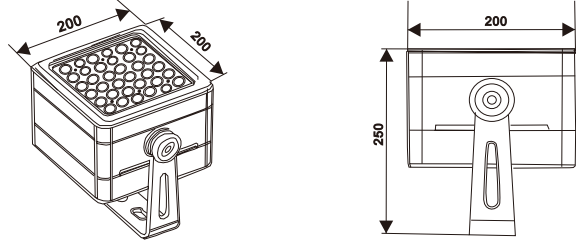

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: 85Ra 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L200*200*H250mm
重量Weight: 7.8kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W/72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-04C	AC85V-265V/DC24V	36W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-04C	AC85V-265V/DC24V	72W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-04C	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD23-05A/SK-TGD23-05XA



产品特点 Features


- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


配光曲线

Distribution Curve

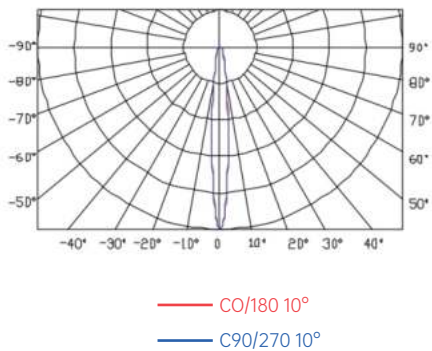


光束角选择

Beam Angle

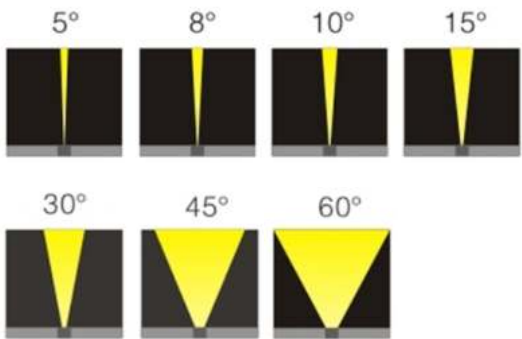

物理尺寸

Dimension

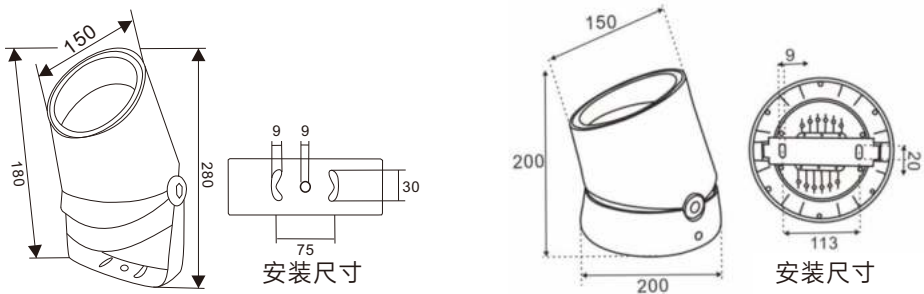

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L150*180*H280mm
重量Weight: 3.0kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 18W~36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-05A SK-TGD23-05XA	AC85V-265V/DC24V	18W	单色 single color	18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-05A SK-TGD23-05XA	AC85V-265V/DC24V	20W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD23-05A SK-TGD23-05XA	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-05B/SK-TGD23-05XB



物理尺寸
Dimension

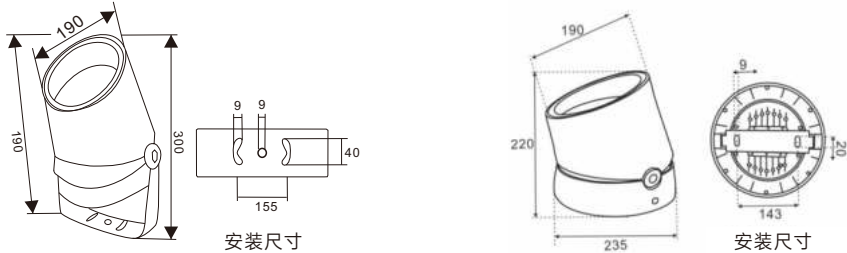

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L190*190*H300mm
重量Weight: 4.6kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-05B SK-TGD23-05XB	AC85V-265V/DC24V	36W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-05B SK-TGD23-05XB	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-05B SK-TGD23-05XB	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-05C/SK-TGD23-05XC



物理尺寸
Dimension

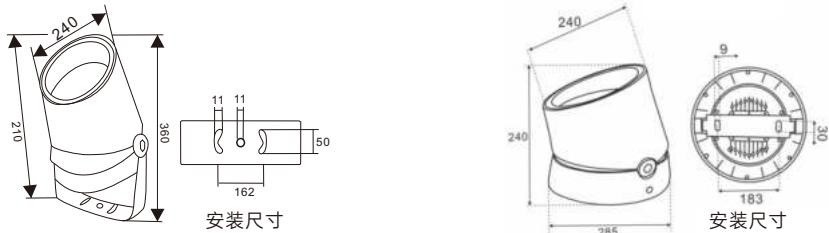

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L240*210*H360mm
重量Weight: 6.6kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter


功率: 54W~108W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-05C SK-TGD23-05XC	AC85V-265V/DC24V	54W/72W	单色 single color	54pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-05C SK-TGD23-05XC	AC85V-265V/DC24V	80W	RGB	54pcs	3 in one	8°~60°	DMX512
SK-TGD23-05C SK-TGD23-05XC	AC85V-265V/DC24V	108W	RGBW	54pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯


► SK-TGD23-06A

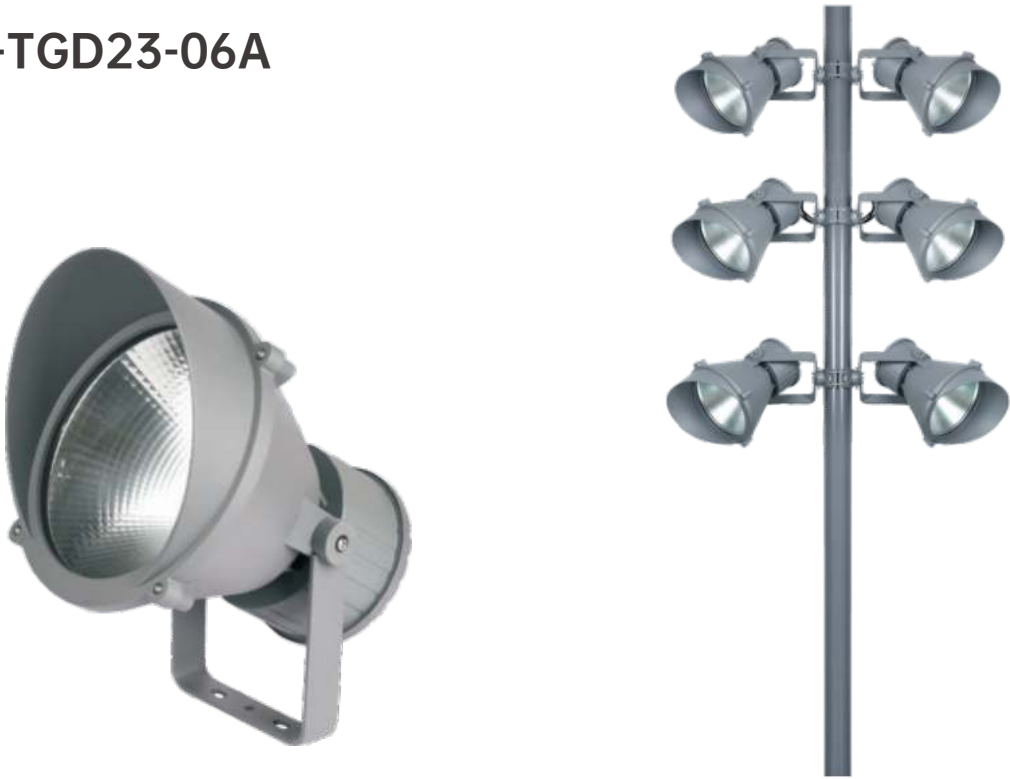


配光曲线
Distribution Curve

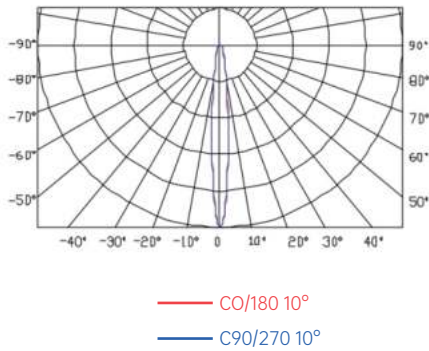

光束角选择
Beam Angle

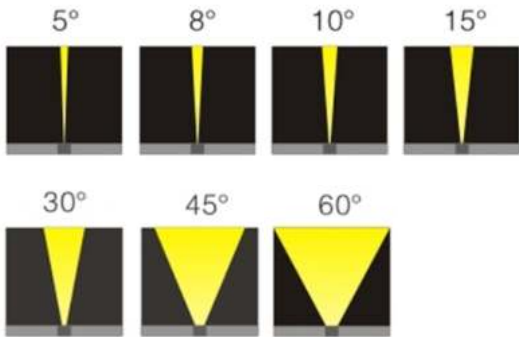

物理尺寸
Dimension

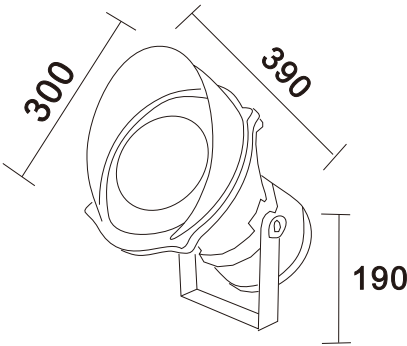

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 300 \times W390 \times H190$ mm
重量Weight: 11.3kg
光学参数Optical parameter
光束角Beam Angle: 60°

电器参数 Electrical parameter

功率: 50W~80W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-06A	AC85V-265V/DC24V	50W~80W	单色 single color	1pcs	Cree/Osram	60°	ON-OFF
SK-TGD23-06A	AC85V-265V/DC24V	50W	RGB	1pcs	3 in one	60°	DMX512
SK-TGD23-06A	AC85V-265V/DC24V	50W	RGBW	1pcs	4 in one	60°	DMX512

产品特征
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD23-06B



物理尺寸
Dimension

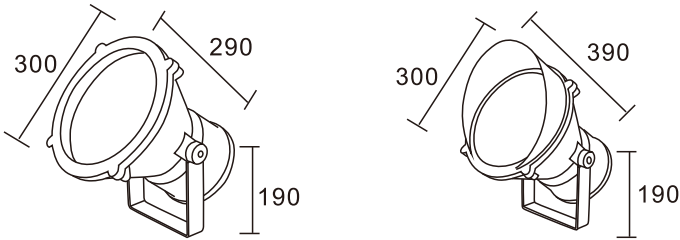

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 300 \times W290 \times H190$ mm
重量Weight: 6.9kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 50W~80W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-06B	AC85V-265V/DC24V	50W	单色 single color	1pcs	Cree/Osram	7°	ON-OFF
SK-TGD23-06B	AC85V-265V/DC24V	50W	RGB	1pcs	3 in one	7°	DMX512
SK-TGD23-06B	AC85V-265V/DC24V	50W~80W	RGBW	1pcs	4 in one	60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-06C



物理尺寸
Dimension

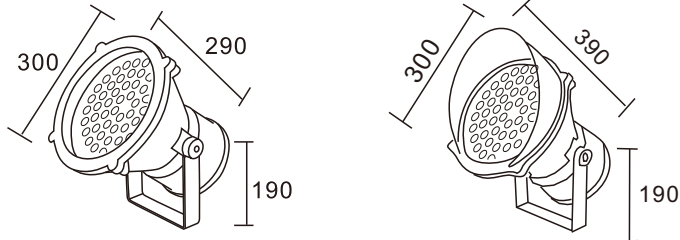

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $L240 \times W285 \times H240$ mm
重量Weight: 6.9kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter


功率: 50W/60W/80W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-06C	AC85V-265V/DC24V	80W	单色 single color	54pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-06C	AC85V-265V/DC24V	96W	RGB	54pcs	3 in one	8°~60°	DMX512
SK-TGD23-06C	AC85V-265V/DC24V	108W	RGBW	54pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯


► SK-TGD23-07A

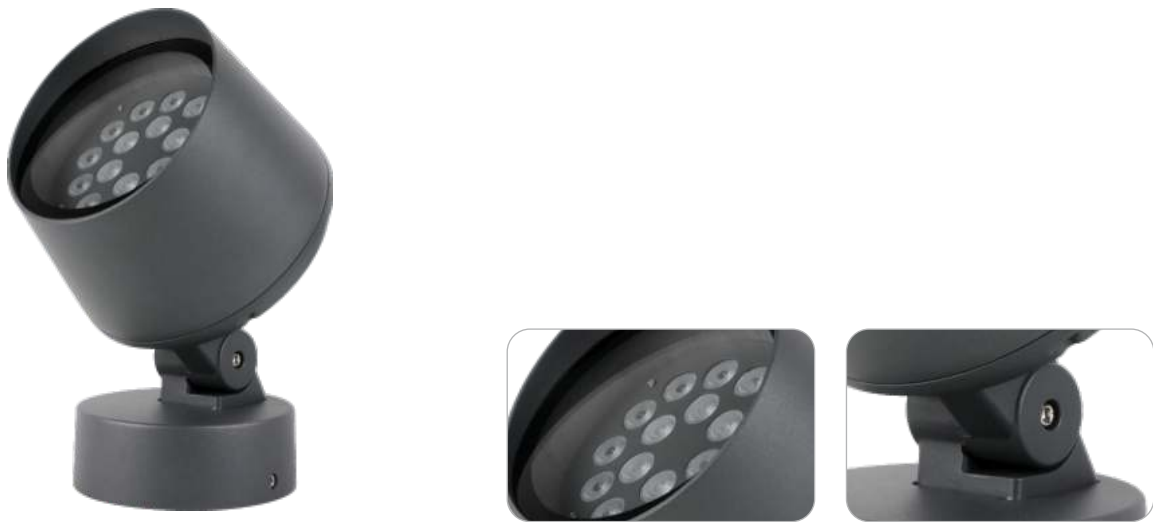


配光曲线
Distribution Curve

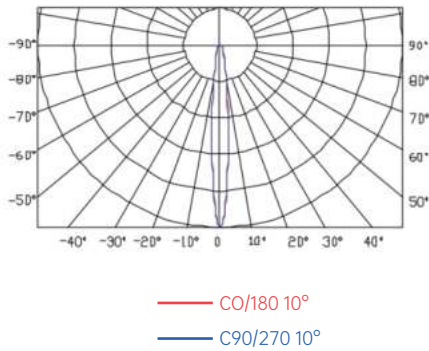

光束角选择
Beam Angle

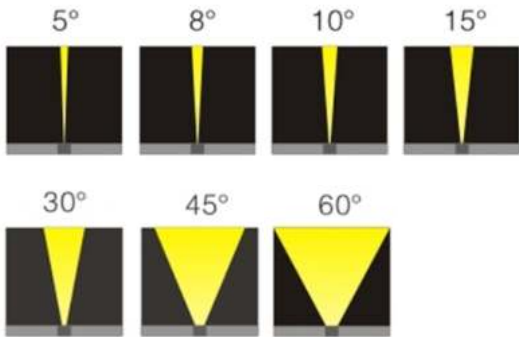

物理尺寸
Dimension

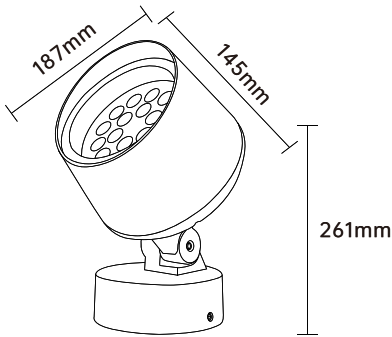

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 187 \times 145 \times H261$ mm
重量Weight: 2.5kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 9W~18W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-07A	AC85V-265V/DC24V	9/12/18W	单色 single color	9/12/18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-07A	AC85V-265V/DC24V	18W	RGB	12pcs	3 in one	8°~60°	DMX512
SK-TGD23-07A	AC85V-265V/DC24V	24W	RGBW	12pcs	4 in one	8°~60°	DMX512

产品特点
Features

- 1. 灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2. 灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3. 光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD23-07B



物理尺寸
Dimension

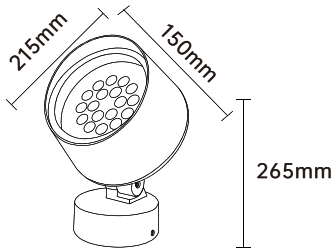

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ215*W150*H265mm
重量Weight: 3.1kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 18W~36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-07B	AC85V-265V/DC24V	18W/24W	单色 single color	18/20pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-07B	AC85V-265V/DC24V	27W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD23-07B	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-07C



物理尺寸
Dimension

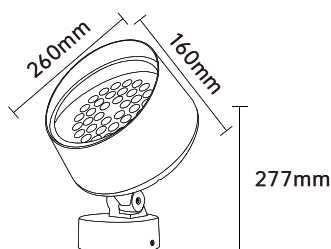

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ260*W160*H277mm
重量Weight: 4.1kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~60W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-07C	AC85V-265V/DC24V	36W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-07C	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-07C	AC85V-265V/DC24V	60W	RGBW	36pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-07D



物理尺寸 Dimension

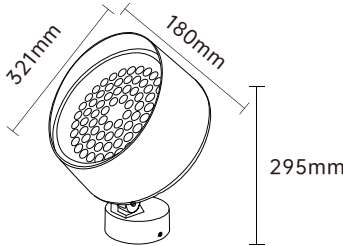

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 321 \times W180 \times H295 \text{mm}$
重量Weight: 6.1kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 48W/72W/96W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-07D	AC85V-265V/DC24V	72W	单色 single color	72pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-07D	AC85V-265V/DC24V	108W	RGB	60pcs	3 in one	8°~60°	DMX512
SK-TGD23-07D	AC85V-265V/DC24V	120W	RGBW	60pcs	4 in one	8°~60°	DMX512



LED FLOODLIGHT

LED投光灯

► SK-TGD23-08A



产品特点 Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.

安装方式 Installation



1.抱箍安装
hoop




2.支架安装
bracket



3.半埋式安装
Inground

物理尺寸 Dimension

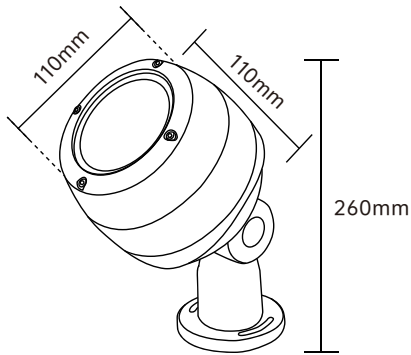

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 150 \times W110 \times H260$ mm
重量Weight: 2.1kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter


功率: 18W/24W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-08A	AC85V-265V/DC24V	18W/24W	单色 single color	9pcs/12pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-08A	AC85V-265V/DC24V	12W	RGB	9pcs	3 in one	8°~60°	DMX512
SK-TGD23-08A	AC85V-265V/DC24V	18W	RGBW	9pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-08B

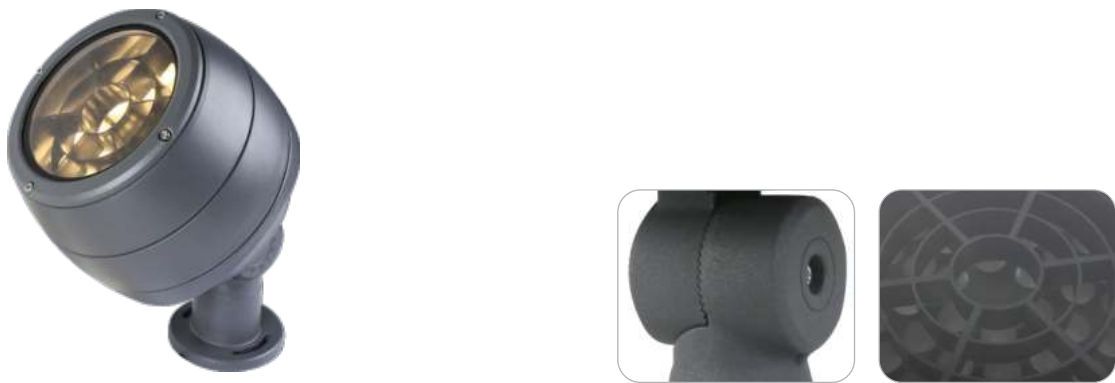

物理尺寸
Dimension

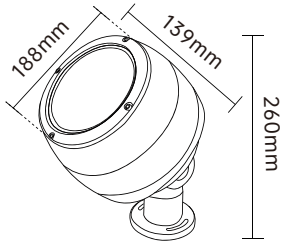

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra 85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ188*W139*H260mm
重量Weight: 3.4kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 24W/36W/48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-08B	AC85V-265V/DC24V	24W/36W	单色 single color	24pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-08B	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD23-08B	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-08C



物理尺寸
Dimension

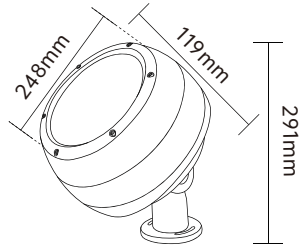

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ248*W119*H291mm
重量Weight: 2.1kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-08C	AC85V-265V/DC24V	36W/60W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-08C	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-08C	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯


► SK-TGD23-09A




配光曲线
Distribution Curve

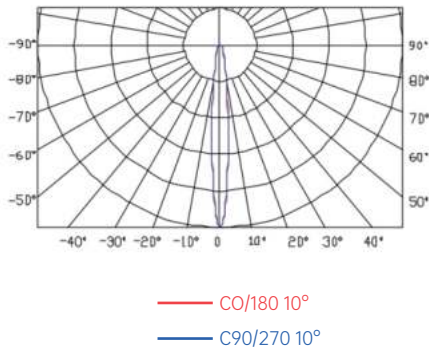

光束角选择
Beam Angle

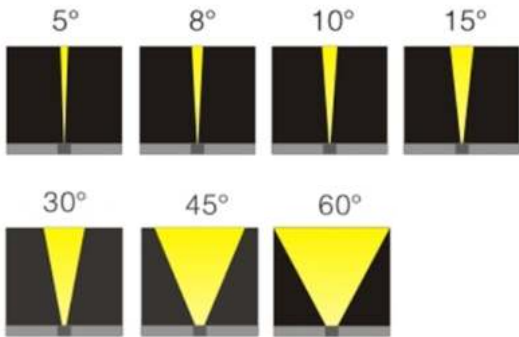

物理尺寸
Dimension

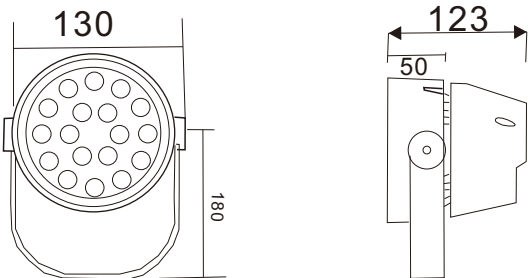

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 130 \times W123 \times H180$ mm
重量Weight: 1.6kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 12W/36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-09A	AC85V-265V/DC24V	12W/18W	单色 single color	12pcs/18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-09A	AC85V-265V/DC24V	20W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD23-09A	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512

产品特征
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
- 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
- 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD23-09B



物理尺寸
Dimension

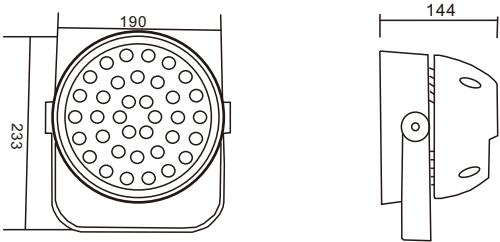

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ190*W144*H233mm
重量Weight: 1.9kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-09B	AC85V-265V/DC24V	36W/48W	单色 single color	24pcs/36pcs	Cree	8°~60°	ON-OFF
SK-TGD23-09B	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD23-09B	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-09C



物理尺寸
Dimension

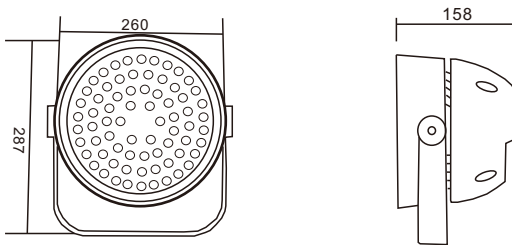

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ260*W158*H287mm
重量Weight: 4.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 72W~144W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-09C	AC85V-265V/DC24V	72W	单色 single color	72pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-09C	AC85V-265V/DC24V	96W	RGB	72pcs	3 in one	8°~60°	DMX512
SK-TGD23-09C	AC85V-265V/DC24V	144W	RGBW	72pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-09D



物理尺寸
Dimension

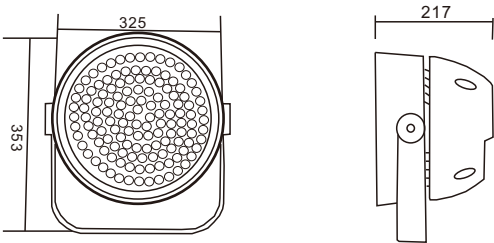


基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 325 \times W217 \times H353$ mm
重量Weight: 9.0kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 150W~360W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-09D	AC85V-265V/DC24V	150W	单色 single color	150pcs	Cree	8°~60°	ON-OFF
SK-TGD23-09D	AC85V-265V/DC24V	300W	RGB	150pcs	3 in one	8°~60°	DMX512
SK-TGD23-09D	AC85V-265V/DC24V	360W	RGBW	150pcs	4 in one	8°~60°	DMX512

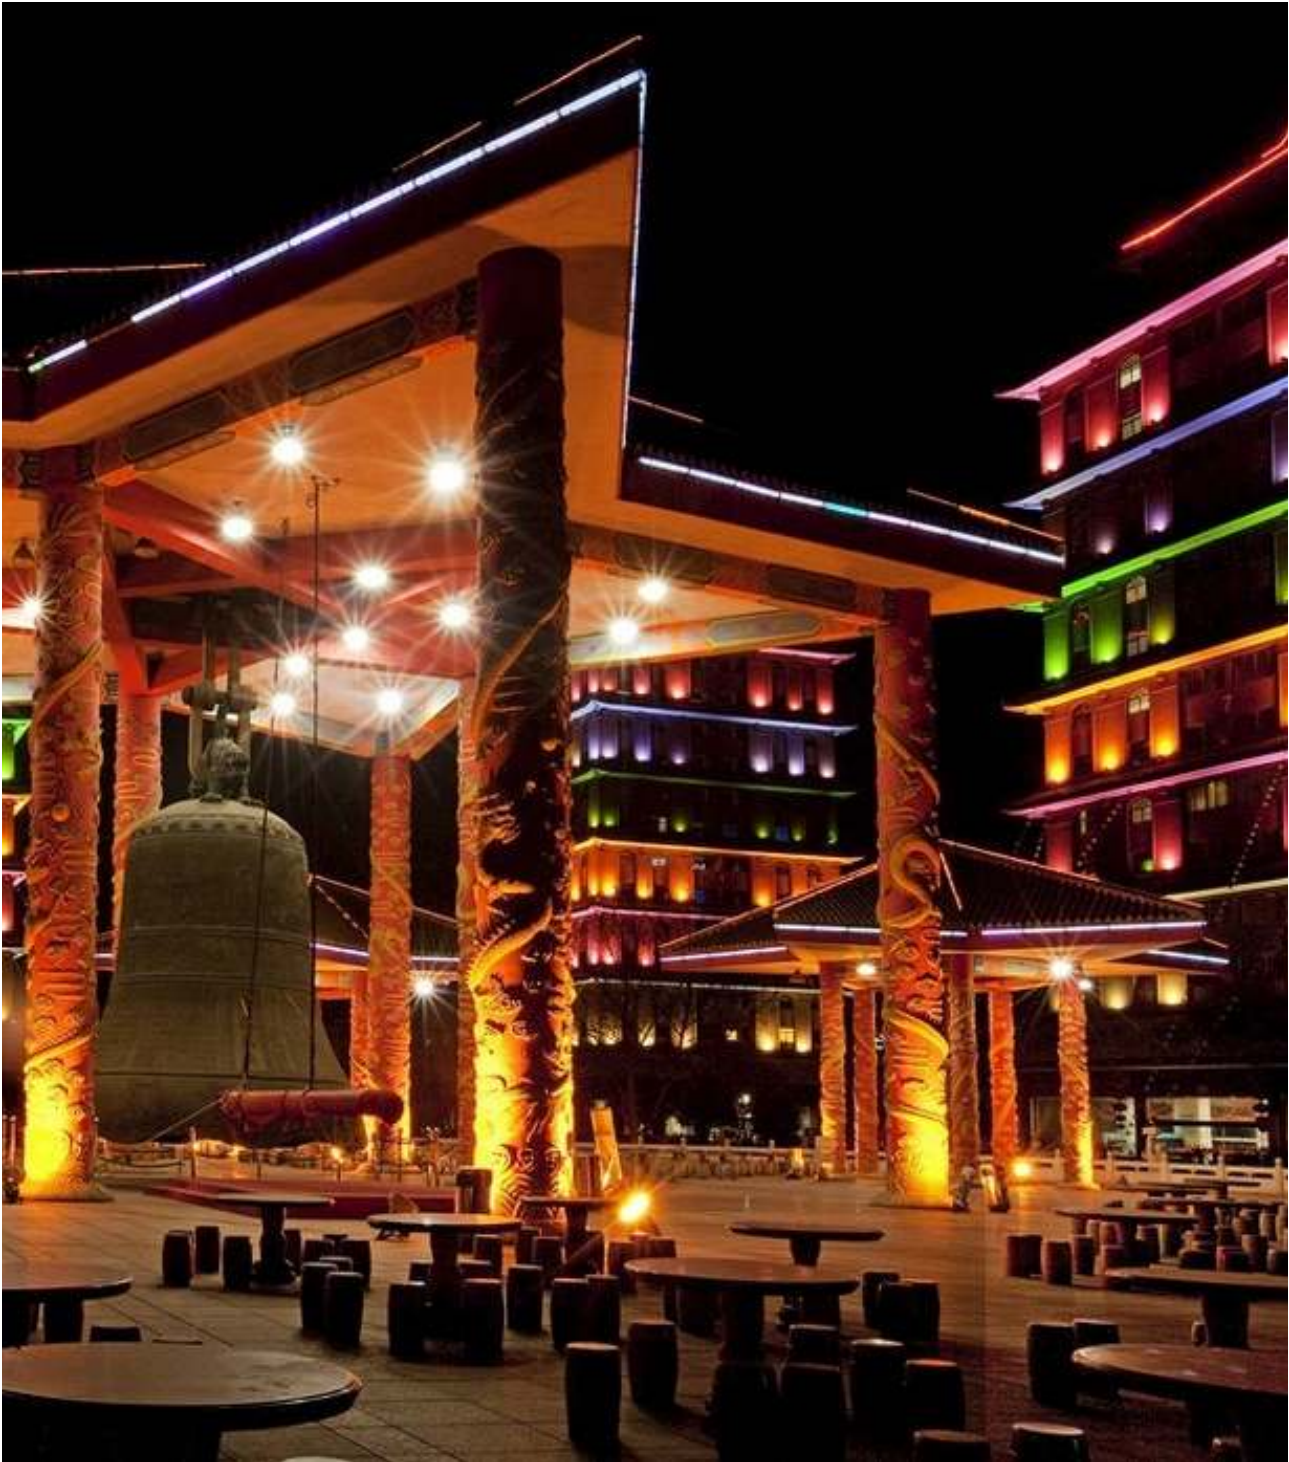


LED FLOODLIGHT

LED投光灯


► SK-TGD23-10AX





配光曲线
Distribution Curve

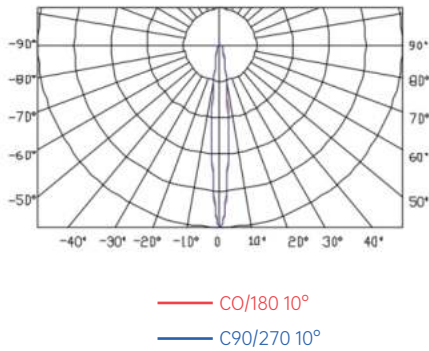

光束角选择
Beam Angle

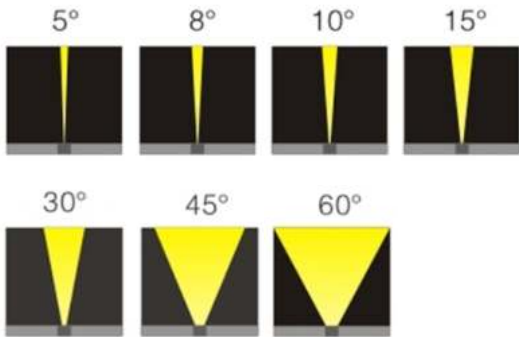

物理尺寸
Dimension

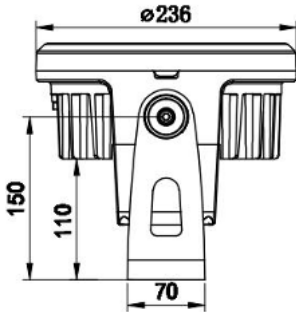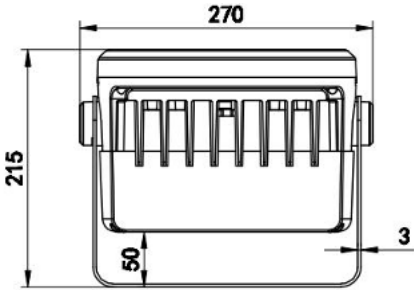

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 236 \times H215\text{mm}$
重量Weight: 4.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 100W/120W/150
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-10AX	AC85V-265V/DC24V	100W	单色 single color	48pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-10AX	AC85V-265V/DC24V	120W	RGB	48pcs	3 in one	8°~60°	DMX512
SK-TGD23-10AX	AC85V-265V/DC24V	150W	RGBW	48pcs	4 in one	8°~60°	DMX512

产品特点 Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD23-10BX



物理尺寸
Dimension

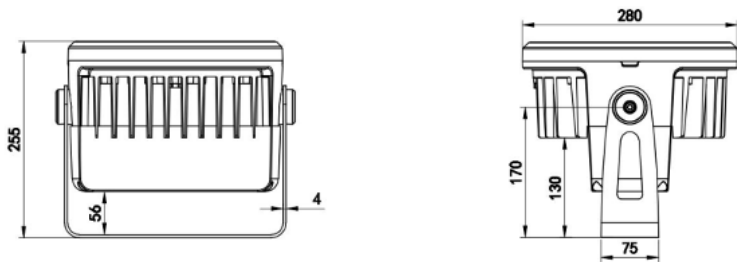

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ280*H255mm
重量Weight: 6.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 150W/180W/240W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-10BX	AC85V-265V/DC24V	150W	单色 single color	72pcs	Cree	8°~60°	ON-OFF
SK-TGD23-10BX	AC85V-265V/DC24V	150W	RGB	72pcs	3 in one	8°~60°	DMX512
SK-TGD23-10BX	AC85V-265V/DC24V	200W	RGBW	72pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-10CX



物理尺寸
Dimension

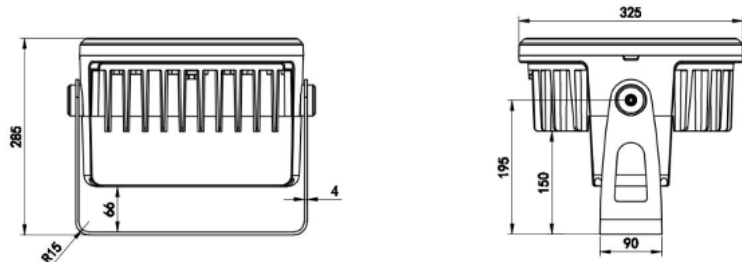

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ325*H285mm
重量Weight: 7.8kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 200W/240W/320
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-10XC	AC85V-265V/DC24V	200W	单色 single color	108pcs	Cree	8°~60°	ON-OFF
SK-TGD23-10XC	AC85V-265V/DC24V	200W	RGB	108pcs	3 in one	8°~60°	DMX512
SK-TGD23-10XC	AC85V-265V/DC24V	240W	RGBW	108pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD23-11A



产品特点
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
- 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
- 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.

安装方式 Installation



1.支架安装
C type bracket




2.半埋式安装
Inground



3.抱箍安装
hoop

物理尺寸
Dimension

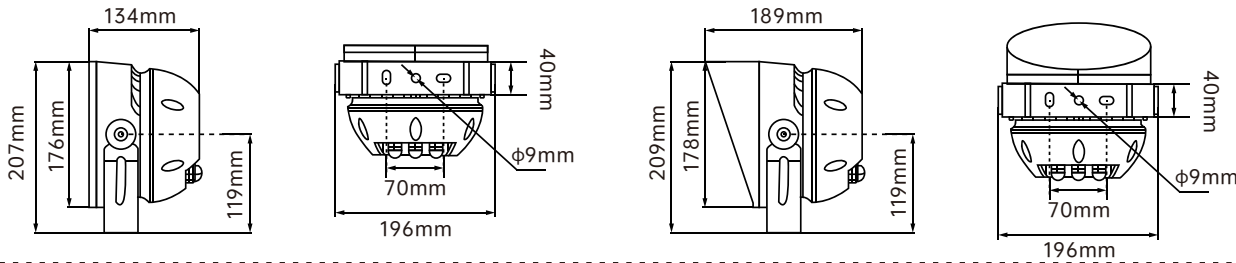

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 176 \times W134 \times H207$ mm
重量Weight: 2.1kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 18W/24W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-11A	AC85V-265V/DC24V	18W/24W	单色 single color	18pcs/24pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-11A	AC85V-265V/DC24V	24W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD23-11A	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-11B



物理尺寸
Dimension

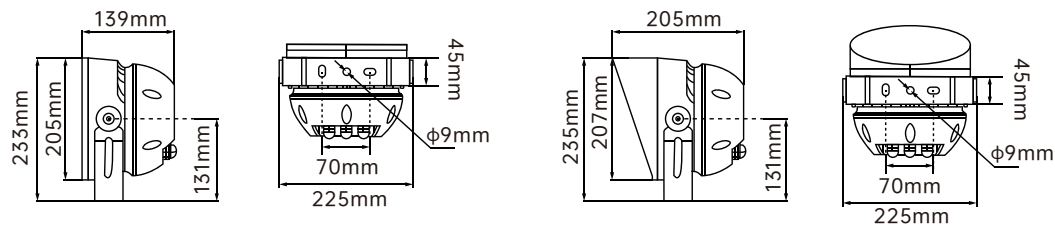

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 233 \times W205 \times H131$ mm
重量Weight: 4.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W/48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-11B	AC85V-265V/DC24V	48W	单色 single color	24pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-11B	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD23-11B	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-11C



物理尺寸
Dimension

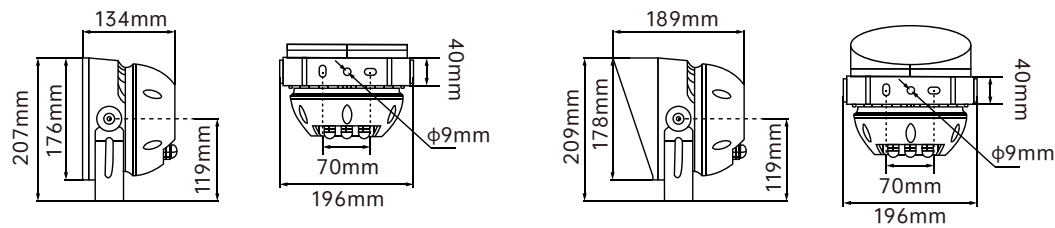

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 207 \times W176 \times H119$ mm
重量Weight: 5.8kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 48W/54W/72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-11C	AC85V-265V/DC24V	48W/36W	单色 single color	48pcs/36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-11C	AC85V-265V/DC24V	54W/36W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-11C	AC85V-265V/DC24V	72W/48W	RGBW	36pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯


► SK-TGD23-12A




配光曲线 Distribution Curve

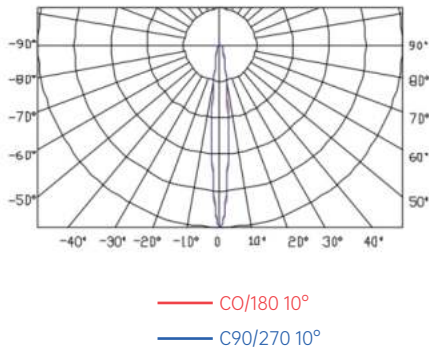

光束角选择 Beam Angle

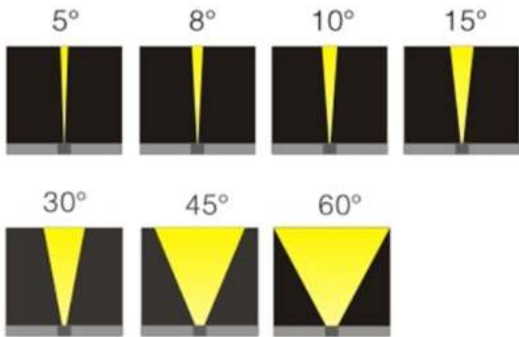

物理尺寸 Dimension

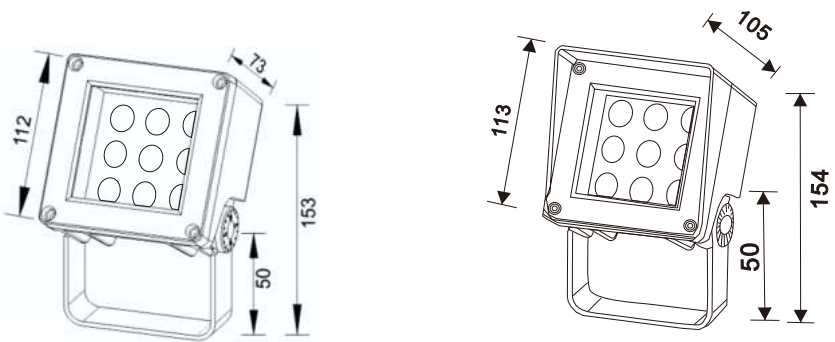

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L112*W73*H153mm
重量Weight: 0.45kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 6W/9W/12W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-12A	AC85V-265V/DC24V	9W/12W	单色 single color	9pcs/12pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-12A	AC85V-265V/DC24V	12W	RGB	9pcs	3 in one	8°~60°	DMX512
SK-TGD23-12A	AC85V-265V/DC24V	18W	RGBW	9pcs	4 in one	8°~60°	DMX512

产品特点 Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.



LED FLOODLIGHT

LED投光灯

► SK-TGD23-12B



物理尺寸
Dimension

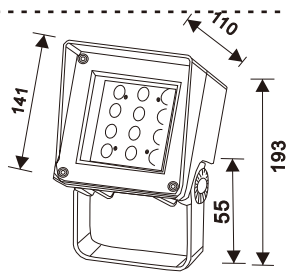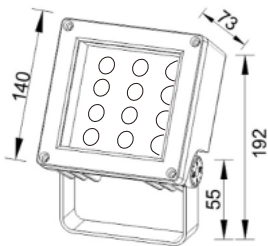

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: 85Ra 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L141*110*H193mm
重量Weight: 1.4kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 12W/18W/24W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-12B	AC85V-265V/DC24V	18W	单色 single color	18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-12B	AC85V-265V/DC24V	18W	RGB	12pcs	3 in one	8°~60°	DMX512
SK-TGD23-12B	AC85V-265V/DC24V	24W	RGBW	12pcs	4 in one	8°~60°	DMX512



LED FLOODLIGHT

LED投光灯

► SK-TGD23-12C



物理尺寸
Dimension

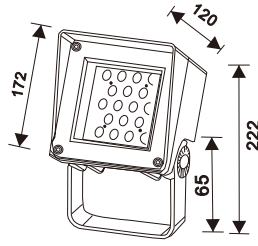

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L172*120*H222mm
重量Weight: 1.8kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 24W/36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-12C	AC85V-265V/DC24V	24W	单色 single color	24pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-12C	AC85V-265V/DC24V	24W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD23-12C	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512



LED FLOODLIGHT

LED投光灯

► SK-TGD23-12D



物理尺寸
Dimension

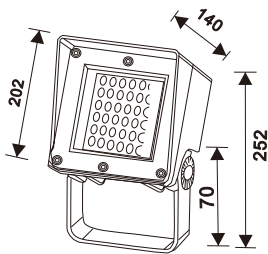

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L202*140*H252mm
重量Weight: 3.6kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W/48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-12D	AC85V-265V/DC24V	36W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-12D	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD23-12D	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512



LED FLOODLIGHT

LED投光灯

► SK-TGD23-12E



物理尺寸
Dimension

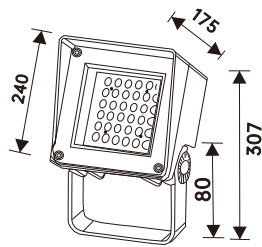

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L240*W175*H307mm
重量Weight: 1.8kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 48W/54W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-12E	AC85V-265V/DC24V	48W	单色 single color	48pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-12E	AC85V-265V/DC24V	48W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-12E	AC85V-265V/DC24V	54W	RGBW	36pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD23-13A



产品特点 Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.

安装方式 Installation



①




②



③

物理尺寸 Dimension

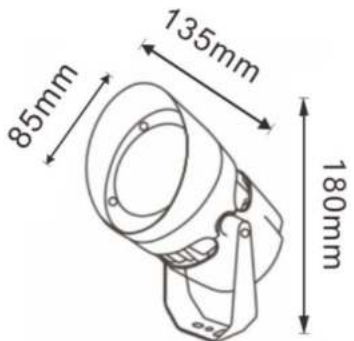

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 85 \times W95 \times H140$ mm
重量Weight: 1.3kg
光学参数Optical parameter
光束角Beam Angle: 3°/8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 6W~12W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-13A	AC85V-265V/DC24V	6W	单色 single color	3pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-13A	AC85V-265V/DC24V	9W	RGB	3pcs	3 in one	8°~60°	DMX512
SK-TGD23-13A	AC85V-265V/DC24V	12W	RGBW	3pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-13B



物理尺寸
Dimension

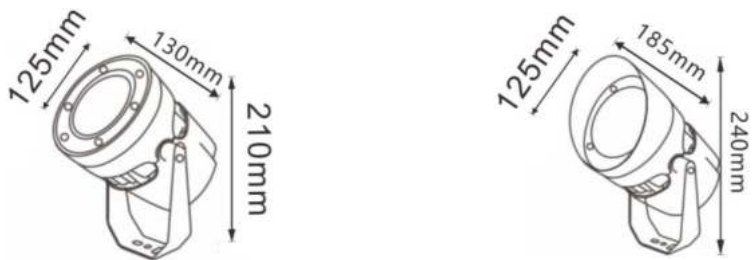

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ125*W130*H210mm
重量Weight: 1.9kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 9W~18W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-13B	AC85V-265V/DC24V	9W/18W	单色 single color	9pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-13B	AC85V-265V/DC24V	12W	RGB	9pcs	3 in one	8°~60°	DMX512
SK-TGD23-13B	AC85V-265V/DC24V	18W	RGBW	9pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD23-13C



物理尺寸
Dimension



基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ165*W180*H280mm
重量Weight: 1.9kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter


功率: 18W~36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-13C	AC85V-265V/DC24V	18W/24W	单色 single color	12pcs/18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-13C	AC85V-265V/DC24V	24W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD23-13C	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-13D

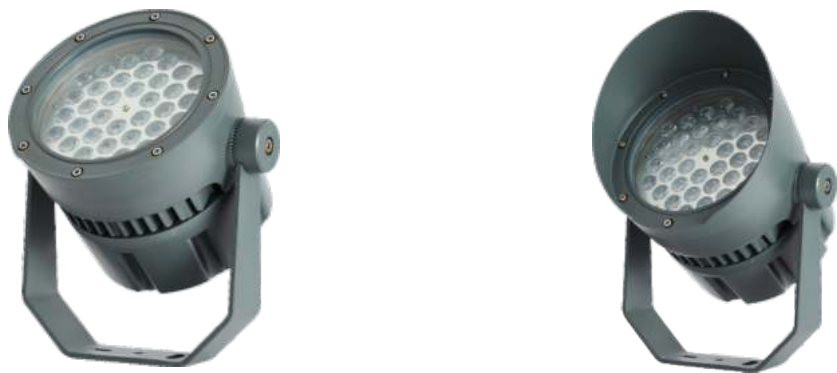

物理尺寸
Dimension

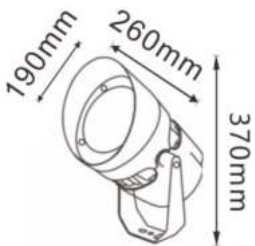

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 190 \times W180 \times H300$ mm
重量Weight: 1.9kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-13D	AC85V-265V/DC24V	36W/48W	单色 single color	24pcs/36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-13D	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD23-13D	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD23-13E



物理尺寸
Dimension

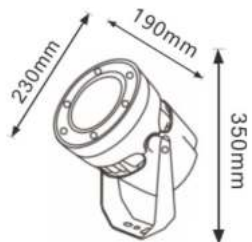

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: 85Ra 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 230 \times W190 \times H350$ mm
重量Weight: 1.9kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 54W~72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-13E	AC85V-265V/DC24V	54W	单色 single color	54pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-13E	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-13E	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD22-01A



产品特点
Features


- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
- 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
- 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


配光曲线

Distribution Curve

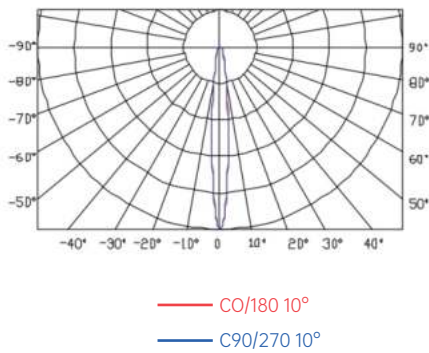


光束角选择

Beam Angle

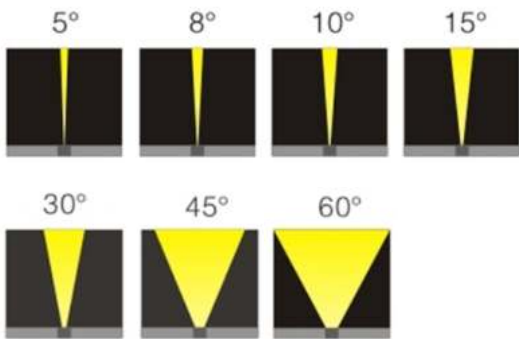

物理尺寸

Dimension

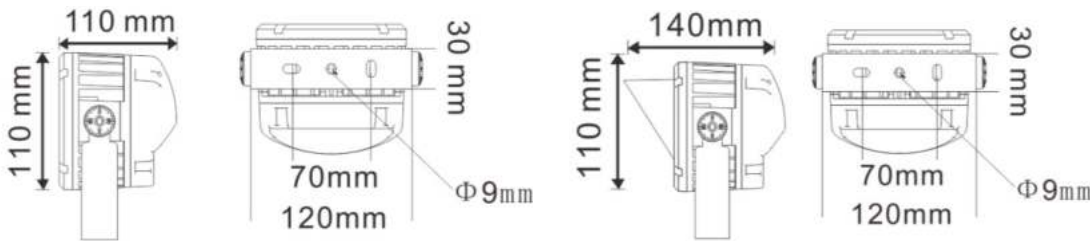

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: φ110*W110*H150mm
重量Weight: 0.62kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 6W~12W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD22-01A	AC85V-265V/DC24V	6W	单色 single color	6pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-01A	AC85V-265V/DC24V	9W	RGB	6pcs	3 in one	8°~60°	DMX512
SK-TGD22-01A	AC85V-265V/DC24V	12W	RGBW	6pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD22-01B



物理尺寸
Dimension

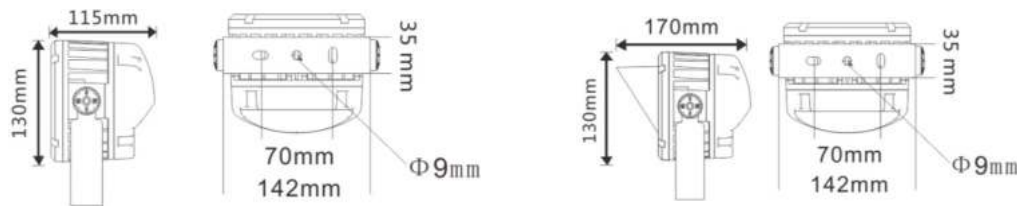

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 130 \times W115 \times H180$ mm
重量Weight: 3.6kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 9W~18W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD22-01B	AC85V-265V/DC24V	9W/12W	单色 single color	9pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-01B	AC85V-265V/DC24V	12W	RGB	9pcs	3 in one	8°~60°	DMX512
SK-TGD22-01B	AC85V-265V/DC24V	18W	RGBW	9pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD22-01C



物理尺寸
Dimension

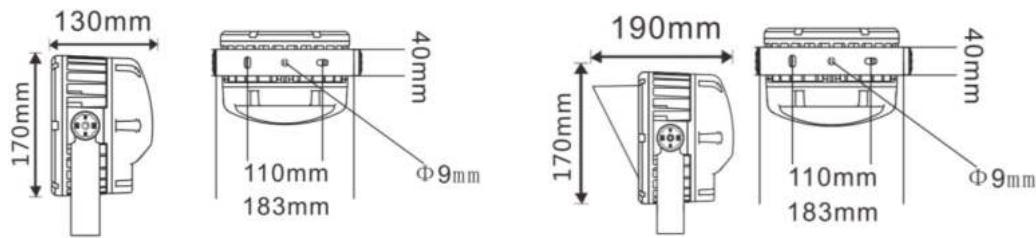

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 170 \times 130 \times H230$ mm
重量Weight: 1.8kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 18W~36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD22-01C	AC85V-265V/DC24V	18W/24W	单色 single color	18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-01C	AC85V-265V/DC24V	24W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD22-01C	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD22-01D



物理尺寸
Dimension

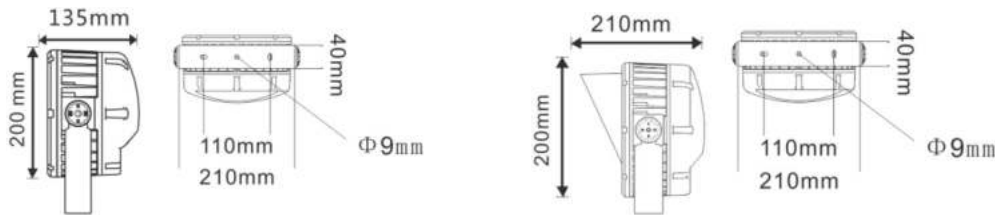

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 200 \times W135 \times H260$ mm
重量Weight: 2.5kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 24W~48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD22-01D	AC85V-265V/DC24V	24W/36W	单色 single color	24pcs/36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-01D	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD22-01D	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD22-01E



物理尺寸
Dimension

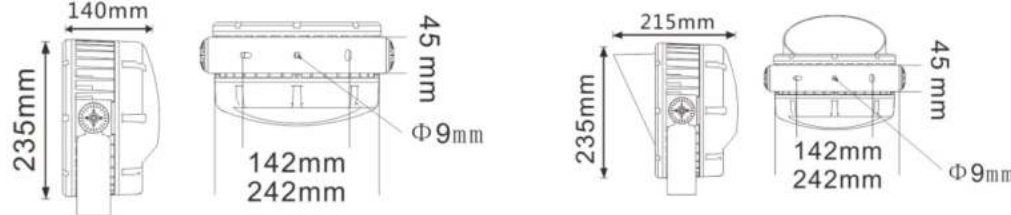

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 235 \times W140 \times H290$ mm
重量Weight: 3.1kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter


功率: 48W~54W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD22-01E	AC85V-265V/DC24V	48W/54W	单色 single color	36pcs/48pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-01E	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD22-01E	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD22-01F

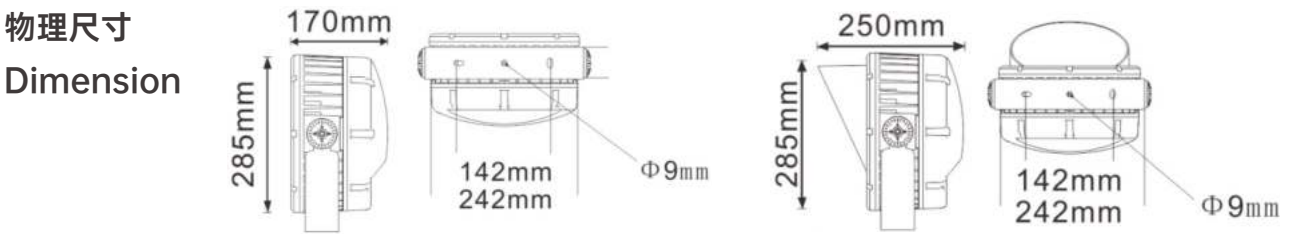

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 285 \times W170 \times H330$ mm
重量Weight: 5.1kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 100W~200W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD22-01F	AC85V-265V/DC24V	100W	单色 single color	100pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-01F	AC85V-265V/DC24V	150W	RGB	100pcs	3 in one	8°~60°	DMX512
SK-TGD22-01F	AC85V-265V/DC24V	200W	RGBW	100pcs	4 in one	8°~60°	DMX512




LED FLOODLIGHT

LED投光灯


► SK-TGD22-02A




配光曲线 Distribution Curve

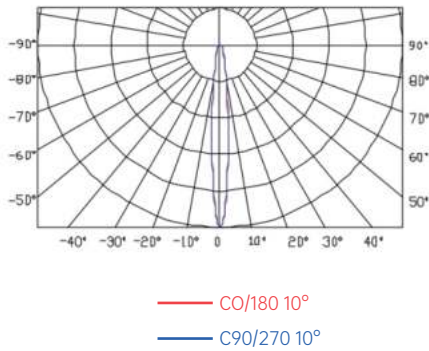

光束角选择 Beam Angle

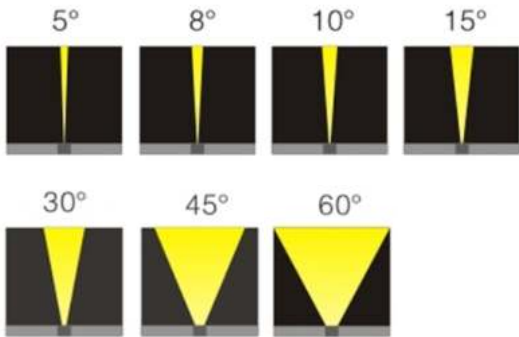

物理尺寸 Dimension

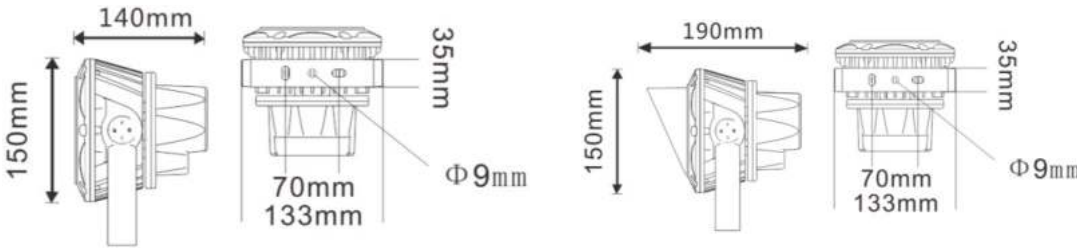

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 150 \times 140 \times H205$ mm
重量Weight: 0.62kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 9W~18W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD22-02A	AC85V-265V/DC24V	9W/12W	单色 single color	9pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-02A	AC85V-265V/DC24V	12W	RGB	9pcs	3 in one	8°~60°	DMX512
SK-TGD22-02A	AC85V-265V/DC24V	18W	RGBW	9pcs	4 in one	8°~60°	DMX512

产品特点 Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所 Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.


LED FLOODLIGHT

LED投光灯

► SK-TGD22-02B



物理尺寸
Dimension

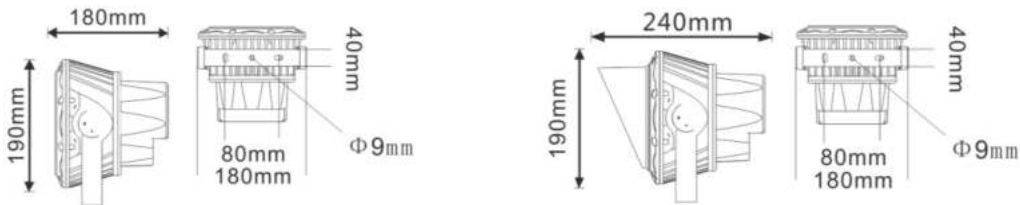

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 190 \times W180 \times H260$ mm
重量Weight: 1.8kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 18W~36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD22-02B	AC85V-265V/DC24V	18W/24W	单色 single color	18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-02B	AC85V-265V/DC24V	24W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD22-02B	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯

► SK-TGD22-02C



物理尺寸
Dimension

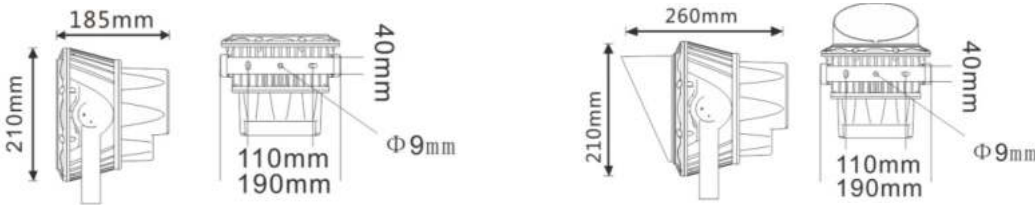

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 210 \times W185 \times H290$ mm
重量Weight: 2.6kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter


功率: 36W~48W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP66
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD22-02C	AC85V-265V/DC24V	36W/48W	单色 single color	24pcs/36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-02C	AC85V-265V/DC24V	36W	RGB	24pcs	3 in one	8°~60°	DMX512
SK-TGD22-02C	AC85V-265V/DC24V	48W	RGBW	24pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD22-02D

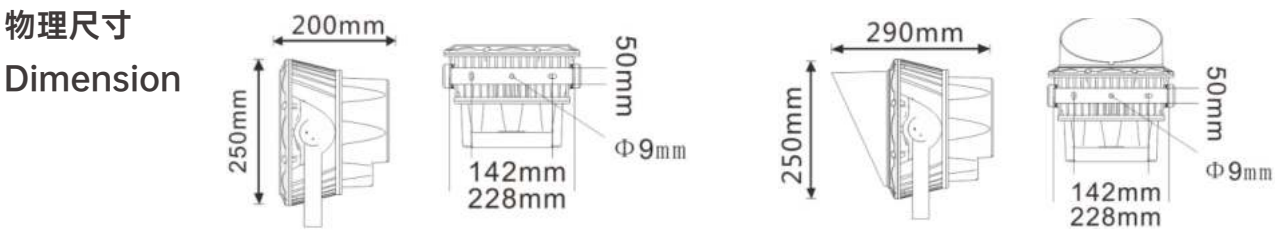


基本参数 Basic parameter	电器参数 Electrical parameter
颜色Color: R/G/B/Y/W/WW/RGB/RGBW	功率: 60W~120W
光源LED Brand: CREE/OSRAM/PHILIPS	电压: AC85V-265V/DC24V
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE	电器安全等级Electrical safety class: I类/III类
寿命Life Span: 35000h	工作条件Working condition
材质Materials: 6063铝+钢化玻璃 Aluminum+TG	工作温度Operating temperature: -40℃-50℃
产品尺寸Dimension: φ210*W185*H330mm	储存温度Storage temperature: -40℃-70℃
重量Weight: 3.6kg	防护等级IP Grade: IP66
光学参数Optical parameter	控制系统Control system
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°	控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD22-02D	AC85V-265V/DC24V	60W/90W	单色 single color	60pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-02D	AC85V-265V/DC24V	90W	RGB	60pcs	3 in one	8°~60°	DMX512
SK-TGD22-02D	AC85V-265V/DC24V	120W	RGBW	60pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD22-02E

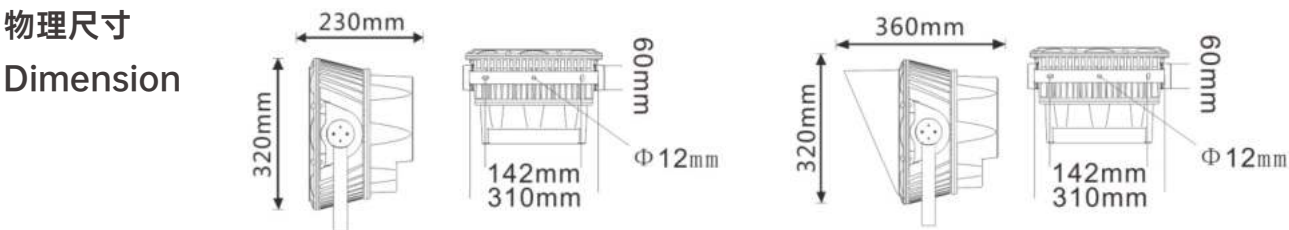

基本参数 Basic parameter	电器参数 Electrical parameter
颜色Color: R/G/B/Y/W/WW/RGB/RGBW	功率: 120W~180W
光源LED Brand: CREE/OSRAM/PHILIPS	电压: AC85V-265V/DC24V
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE	电器安全等级Electrical safety class: I类/III类
寿命Life Span: 35000h	工作条件Working condition
材质Materials: 6063铝+钢化玻璃 Aluminum+TG	工作温度Operating temperature: -40℃-50℃
产品尺寸Dimension: φ172*120*H410mm	储存温度Storage temperature: -40℃-70℃
重量Weight: 4.5kg	防护等级IP Grade: IP66
光学参数Optical parameter	控制系统Control system
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°	控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD22-02E	AC85V-265V/DC24V	120W/150W	单色 single color	120pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD22-02E	AC85V-265V/DC24V	120W	RGB	90pcs	3 in one	8°~60°	DMX512
SK-TGD22-02E	AC85V-265V/DC24V	180W	RGBW	90pcs	4 in one	8°~60°	DMX512


LED FLOODLIGHT

LED投光灯


SK-TGD23-14A





配光曲线
Distribution Curve

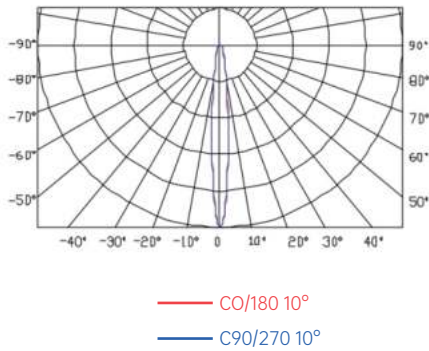

光束角选择
Beam Angle

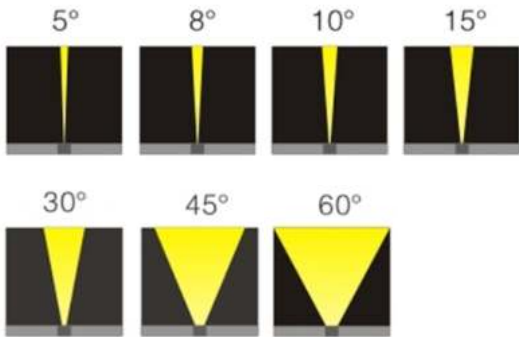

物理尺寸
Dimension

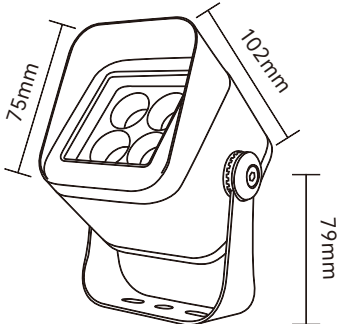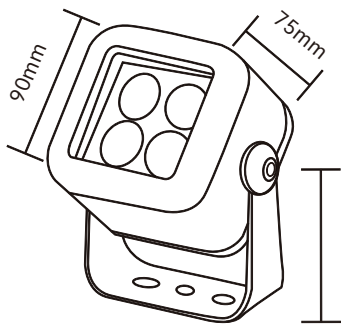

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L90*W75*H79mm
重量Weight: 0.7kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 8W~12W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-14A	AC85V-265V/DC24V	8W	单色 single color	4pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-14A	AC85V-265V/DC24V	8W	RGB	4pcs	3 in one	8°~60°	DMX512
SK-TGD23-14A	AC85V-265V/DC24V	12W	RGBW	4pcs	4 in one	8°~60°	DMX512

产品特点
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
- 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
- 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.



LED FLOODLIGHT

LED投光灯

► SK-TGD23-14B



物理尺寸
Dimension

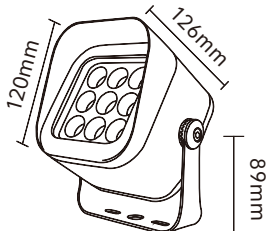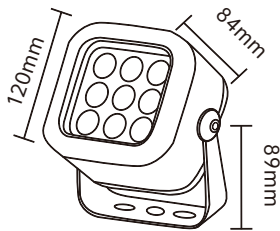

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L120*W84*H89mm
重量Weight: 1.1kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 15W~18W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-14B	AC85V-265V/DC24V	18W	单色 single color	9pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-14B	AC85V-265V/DC24V	15W	RGB	9pcs	3 in one	8°~60°	DMX512
SK-TGD23-14B	AC85V-265V/DC24V	18W	RGBW	9pcs	4 in one	8°~60°	DMX512



LED FLOODLIGHT

LED投光灯

► SK-TGD23-14C



物理尺寸
Dimension

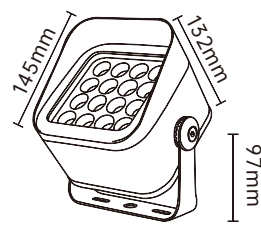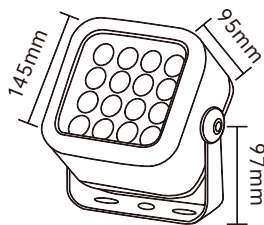

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L145*W95*H97mm
重量Weight: 1.6kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 20W~36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-14C	AC85V-265V/DC24V	32W	单色 single color	16pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-14C	AC85V-265V/DC24V	24W	RGB	16pcs	3 in one	8°~60°	DMX512
SK-TGD23-14C	AC85V-265V/DC24V	26W	RGBW	16pcs	4 in one	8°~60°	DMX512



LED FLOODLIGHT

LED投光灯

► SK-TGD23-14D



物理尺寸
Dimension

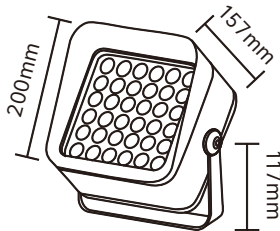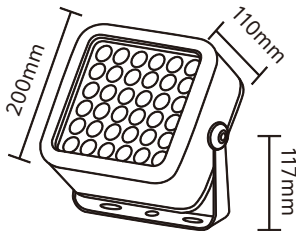

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: L200*W110*H117mm
重量Weight: 3.3kg
光学参数Optical parameter
光束角Beam Angle: 8°/10°/15°/25°/30°/45°/60°

电器参数 Electrical parameter

功率: 36W~72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-14D	AC85V-265V/DC24V	36W/54W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-14D	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-14D	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512




LED FLOODLIGHT

LED投光灯


► SK-TGD23-15A




配光曲线
Distribution Curve

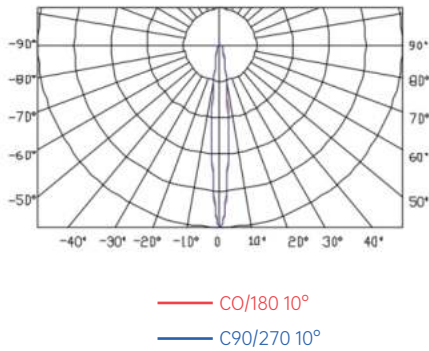

光束角选择
Beam Angle

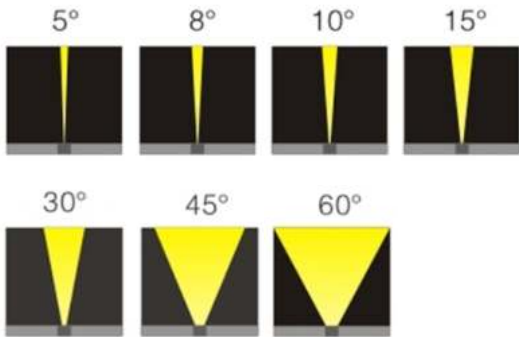

物理尺寸
Dimension

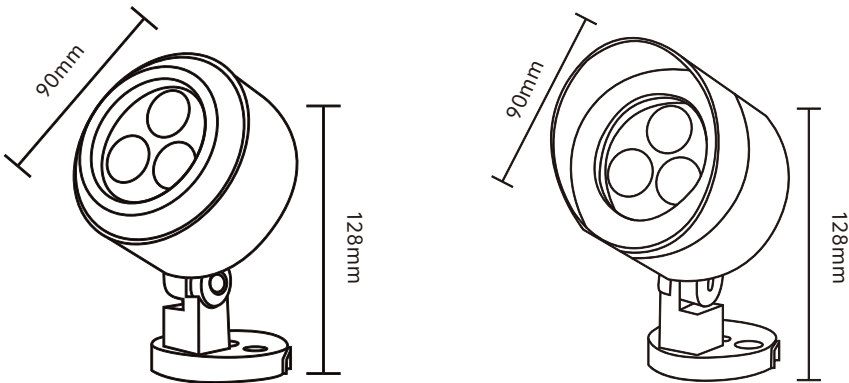

基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 90 \times H128\text{mm}$
重量Weight: 0.6kg
光学参数Optical parameter
光束角Beam Angle: 6°/15°/20°/30°/60°/10°*60°

电器参数 Electrical parameter

功率: 6W~12W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-15A	AC85V-265V/DC24V	6W	单色 single color	3pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-15A	AC85V-265V/DC24V	9W	RGB	3pcs	3 in one	8°~60°	DMX512
SK-TGD23-15A	AC85V-265V/DC24V	12W	RGBW	3pcs	4 in one	8°~60°	DMX512

产品特点
Features

- 1.灯具外壳均采用优质铝型材，压铸铝端盖;表面阳极或喷漆处理。灯体精致美观散热性能好。
 - 2.灯体采用钢化玻璃和防水硅胶密封，并内部环氧树脂灌封，具有双重防水功能，防水效果优越。
 - 3.光源均采用进口高流明大功率LED芯片，内置恒流电源，确保了灯具的稳定性能。
1. The lamp body is made of high quality aluminum, die-cast aluminum end cover; Anodized or painted surface. Exquisite and beautiful, good heat dissipation.
2. The lamp body is waterproof structure, using toughened glass and waterproof silicone seal, no need to fill glue, waterproof performance is good.
3. Use Osram or Cree imported chip as light source. built-in high PF constant current driver to ensure the stability of the lamp.

应用场所
Application

该系列产品广泛适用于，建筑外墙、楼体、廊柱、广场灯光、园林树木、道路等场合。
This series of products are widely used in external walls, buildings, pillars, square lights, garden trees, roads and other occasions.

LED FLOODLIGHT

LED投光灯

► SK-TGD23-15B



物理尺寸
Dimension



基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 130 \times H198\text{mm}$
重量Weight: 0.9kg
光学参数Optical parameter
光束角Beam Angle: 6°/15°/20°/30°/60°/10°/60°

电器参数 Electrical parameter

功率: 12W~18W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-15B	AC85V-265V/DC24V	18W	单色 single color	9pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-15B	AC85V-265V/DC24V	12W	RGB	9pcs	3 in one	8°~60°	DMX512
SK-TGD23-15B	AC85V-265V/DC24V	18W	RGBW	9pcs	4 in one	8°~60°	DMX512

LED FLOODLIGHT

LED投光灯

► SK-TGD23-15C



物理尺寸
Dimension



基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 175 \times H268\text{mm}$
重量Weight: 1.8kg
光学参数Optical parameter
光束角Beam Angle: 6°/15°/20°/30°/60°/10°/60°

电器参数 Electrical parameter

功率: 24W~36W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I类/III类
工作条件Working condition
工作温度Operating temperature: -40°C-50°C
储存温度Storage temperature: -40°C-70°C
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDs	光束角 Beam Angle	控制方式
SK-TGD23-15C	AC85V-265V/DC24V	36W	单色 single color	18pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-15C	AC85V-265V/DC24V	24W	RGB	18pcs	3 in one	8°~60°	DMX512
SK-TGD23-15C	AC85V-265V/DC24V	36W	RGBW	18pcs	4 in one	8°~60°	DMX512



LED FLOODLIGHT

LED投光灯

► SK-TGD23-15D



物理尺寸
Dimension



基本参数 Basic parameter

颜色Color: R/G/B/Y/W/WW/RGB/RGBW
光源LED Brand: CREE/OSRAM/PHILIPS
显色指数 CRI: Ra85 驱动Driver Brand: Meanwell/DONE
寿命Life Span: 35000h
材质Materials: 6063铝+钢化玻璃 Aluminum+TG
产品尺寸Dimension: $\phi 220 \times H230$ mm
重量Weight: 2.8kg
光学参数Optical parameter
光束角Beam Angle: 6°/15°/20°/30°/60°/10°*60°

电器参数 Electrical parameter

功率: 36W~72W
电压: AC85V-265V/DC24V
电器安全等级Electrical safety class: I 类/III类
工作条件Working condition
工作温度Operating temperature: -40℃-50℃
储存温度Storage temperature: -40℃-70℃
防护等级IP Grade: IP65
控制系统Control system
控制方式Control Mode: on-off/DMX512

产品型号 Item No	工作电压 Voltage	功率 Power	颜色 Color	灯珠数 LED QTY	光源 LEDS	光束角 Beam Angle	控制方式
SK-TGD23-15D	AC85V-265V/DC24V	36W~54W	单色 single color	36pcs	Cree/Osram	8°~60°	ON-OFF
SK-TGD23-15D	AC85V-265V/DC24V	54W	RGB	36pcs	3 in one	8°~60°	DMX512
SK-TGD23-15D	AC85V-265V/DC24V	72W	RGBW	36pcs	4 in one	8°~60°	DMX512

